


#### CROSS SECTION OF THRESHOLD

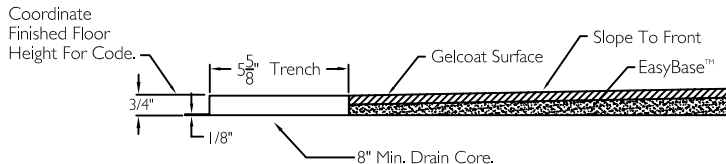

## SUBMITTAL

This shower enclosure shall be model XST 5050 BF 5P .75" right or left. Finished surface shall be of a sanitary grade polyester gelcoat exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583, Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 50 3/8" x 50 1/4" x 78".

The unit shall meet ANSI Z124.1-2. HUD, BOCA, NAHB, UPC, and shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following accessories:

- 1) One 36" x 1 1/4" diameter, 18 gauge white grab bar on the back wall,
- 2) two 28" x 1 1/4" diameter, 18 gauge white grab bar, one on each side wall, all with 1 1/2" statute clearance, shipped loose to be field secured from the rear by others, with stainless steel bolts, and 3" x 3" x 1 1/2" gauge metal mounting plates,
- 3) one inch diameter, 18 gauge white curtain rod, shipped loose, to be field installed by others,
- 4) lower molded ledge,
- 5) tile finish,
- 6) self locking guide pin wall interlocking system,
- 7) integral front trench drain,
- 8) 5 piece sectional design,
- 9) tri cell backing,
- 10) 3/4" threshold,
- 11) EasyBase™ self sustaining bottom.

#### OPTIONAL ACCESSORIES:

Factory Plumbing Install Option: ☐ YES ☐ NO

☐ PB Pressure Balancing Mixing Valve (ADA / ANSI)

☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / ANSI)

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 50 3/8" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. XST 5050 TR 5P .75 U-Bar-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Engineer			Drawing No. XST 5050 TR 5P .75 WHBW WHSW(2) WCR EB	
	Rep			Date Issued. 6-7-12	Drawing Rev.
	Wholesaler			Material. Gelcoat Surface	
	Comments			Color.	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm$ 1/2"	