

MONORAIL

MonoRail Surface Transformer-300W 24V Mag

DESCRIPTION

This single-feed surface transformer converts standard 120 line-voltage to 24 volts to provide the necessary voltage for powering a MonoRail low-voltage lighting system. It can power lamps totaling up to 300 watts. The transformer is concealed inside a decorative housing with a fast acting secondary circuit breaker that will safely turn the system off should a short occur. Once the short has been removed the breaker can be reset.

INSTALLATION


This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box (not included). Rail is installed through the power feeds on the canopy to bring power to the run.

OTHER

Black and white finish have satin nickel feeds. The shortest rigid standoff that can be used with this surface transformer is the 4" rigid standoff (sold separately). If dropping the rail more than 4" below the ceiling, order the desired rigid standoff length and one compatible power extender (sold separately). This surface transformer may be plugged in with the addition of a Plug Option, a 16' cord with plug (sold separately). 24 volt transformers require the use of 24 volt lamps.

WEIGHT

12.15lb / 5.51kg ±

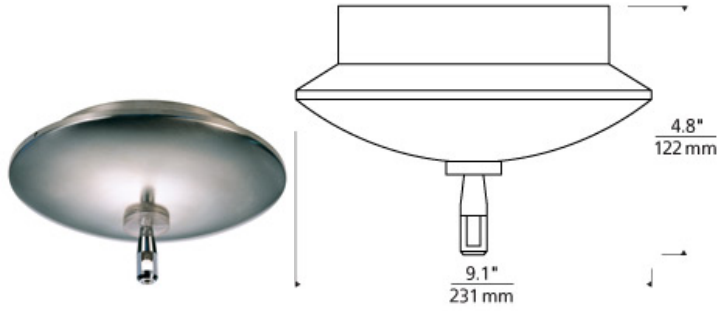

ORDERING INFORMATION

700MOSRT324D FINISH

- Z ANTIQUE BRONZE
- B BLACK
- C CHROME
- S SATIN NICKEL
- W WHITE



700MOSRT324D _____
FIXTURE TYPE: _____
JOB NAME: _____
NOTES: _____



©2015 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.